3" "TANKFLY" ™
clamped butterfly valve
Specification sheet

APPLICATION

3" "TANKFLY" ™ clamped butterfly valve is used for chemicals and liquid foodstuffs, transported in tank containers, rail tanks, road tankers and static tank.

- **Compact design**
- **Easy maintenance and cleaning**
  Easy replacement of the main seal
- **Easy handling**
  Opening/closing : ¼ turn
- **Construction stainless steel**
  Casting 316L
- **FEP / PTFE seals**

Weight : 3,250 Kg

- **CHARACTERISTICS :**
  - Working pressure : 6 bar
  - Test pressure : : 9 bar
  - Opening torque : 2 daN.m
  - Design temperature : -40°C / +190°C

Certification :
- *Lloyd's Register n° BDX 900038/1*
- *IMDG conformity*

OPTIONS AND CODIFICATION
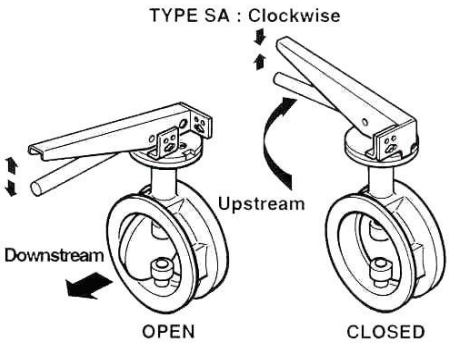
Description	PART N°
"TANKFLY" – SA clockwise / clamped 3"	12 85 57 00 00
"TANKFLY" – SI anti-clockwise / clamped 3"	12 85 58 00 00
Semispheric obturator	on request
Locking handle	on request