

The remote control is designed to open from ground level valves which are installed on top of a container. It guarantees the safety of operators that no longer need to go on top of a tank container. It's available in left or right lever.

**Caution: valve, valve lever and bolts are not included**

**SPECIFICATION**

Made of (material)	Stainless steel
Fixation on tank frame	By bolting or welding
Operating	Manually with remote handle
Working temperature	-40° to +190°C

	Cable Ø	Rcable mini	Working load	Maximum Load	Valve lever center distance
<b>RMT3</b>	6 mm	125 mm	340N	500N	66 mm
<b>RMT5</b>	8 mm	125 mm	600N	900N	69 mm


**CODIFICATION REMOTE LEVERS**

AD3 ND32 ball valve	11 14 15 60 00
AF3 ND32 ball valve	11 14 02 21 00
AT4 ND32 dual ball valve	12 96 07 16 00
TT5 ND50 butterfly valve	11 17 20 11 00
TF5 ND50 butterfly valve	11 17 20 11 00
ATC5 ND50 dual ball valve	11 24 06 00 01
ADN4 ND40 ball valve	11 14 99 30 01
ADC5 ND50 ball valve	11 14 99 30 01



AFN4 ND40 ball valve	11 14 55 91 00
AD5X7 ND50 ball valve	
AD5X16 ND50 ball valve	
AFN5 ND50 ball valve	
ALN5 ND50 ball valve	
AKN5 ND50 ball valve	on request
AHN5 ND80-ND50 ball valve	

*please see p2 for pictures of valves*


**DIMENSIONAL DRAWING**

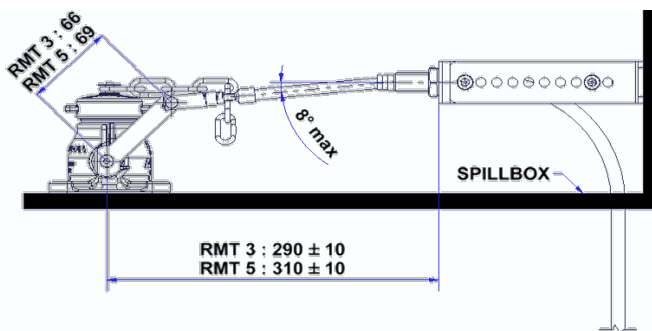

**LEFT**

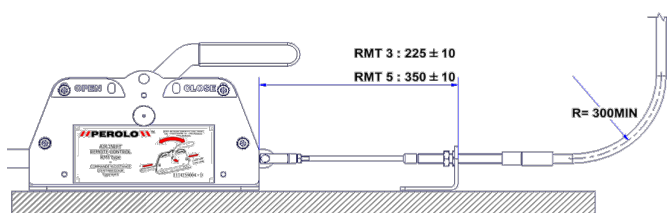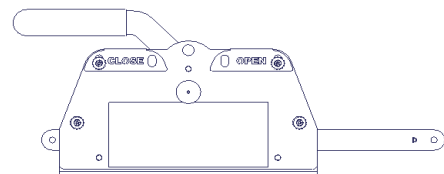

**RIGHT**

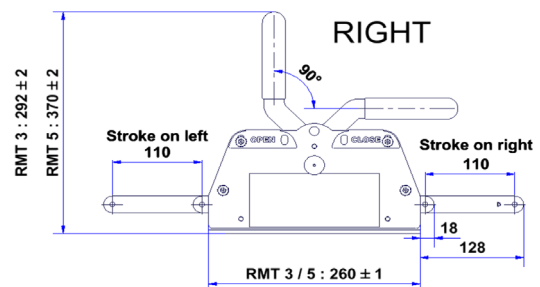

Due to our policy of continuous product improvement, specifications may change without notice - Specification sheet PWA 11 14 15 20 00 C

It is the customer's responsibility to check the compatibility between valves material and transported product.

PEROLO SAS, 69 Rue des Maçons, 33390 Blaye, FRANCE -Phone : + 33 (0)5 5742 67 00 - Email : sales@perolo.com

### CODIFICATION

<b>STANDARD PART NUMBER</b>	RMT	3	3	.
-----------------------------	-----	---	---	---
















<b>YOUR PART NUMBER</b>	RMT
-------------------------	-----

MODEL	
ND32 & ND40 ball valve	3
ND50 or ND80 butterfly valve & ND50 ball valve	5

CABLE LENGTH - other on request	
3 meters	3
4 meters	4
5 meters	5
7 meters	7
8 meters	8

POSITION OF THE LEVER	
Left lever	.
Right lever	R

**Please contact us for specific demands**

RMT3			RMT5	
				
ADC3 Ball Valve	AF3 Ball Valve	AT4 Ball Valve	AFN4 Ball Valve	ADN4 Ball Valve
RMT5				
				
ADC5 Ball Valve	AD5X7 Ball Valve	AD5X16 Ball Valve	TF5 Butterfly Valve	TT5 Butterfly Valve
				
ATC5 Ball Valve	AFN5 Ball Valve	AHN5 Ball Valve	ALN5 Ball Valve	AKN5 Ball Valve

